

GMS100C / GMS100CS

Features:

- Excitation system: self-excited (AREP and PMG are optional)
- ATS (automatic transfer switch) receptacle
- Lockable battery isolator switch
- Stainless galvanized zinc plates with strong corrosion resistance
- Vibration isolators between the engine/alternator and base frame
- Integrated wiring design
- Base fuel tank for at least 8 hours running
- Equipped with an industrial muffler
- Engine oil pump
- 50 C radiator
- Top lifting and steel base frame with forklift holes
- Drainage for fuel tank
- Complete protection functions and safety labels
- IP54 (soundproof sets), IP56 (control system)
- Water jacket preheater, oil heater and double air cleaner, etc. are available.



Output Ratings

Generating Set Model	Prime	Standby
GMS100C/S	100kVA/80kW	110kVA/88kW

Ratings at 0.8 power factor.


Ratings and Performance Data

Engine Make & Model:	6BT5.9-G2	
Alternator Model:	UCI274C	
Alternator Brand:	STAMFORD	
Control System:	PLC-920 / PLC-7420	
Noise Level@7m:	63.6-74.5	
Frequency & Phase:	50Hz & 3PH	
Engine Speed: RPM	1500	
Structure Type:	GMS100C	A
	GMS100CS	R
Fuel Tank Capacity: L	GMS100C	380
	GMS100CS	280
Fuel Consumption: l/hr (100% Load)	Prime	22
	Standby	25

Dimensions and Weights

Generating Set Model	Length (L) mm (in)	Width (W) mm (in)	Height (H) mm (in)	Dry kg (lb)
GMS100C	2110	891	1530	1231
GMS100CS	3162	1122	1834	2056

Dry = With Lube Oil Wet = With Lube Oil and Coolant

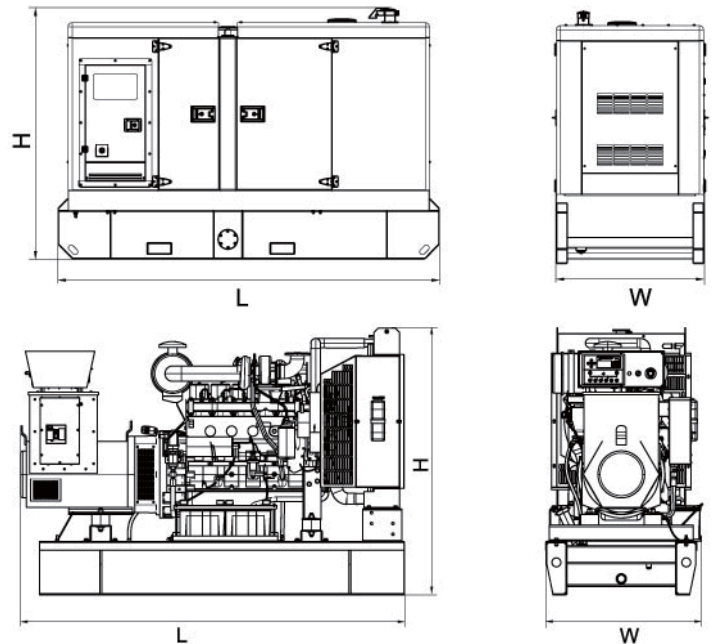

Also available in the following voltages: 415/240V-380/220V-220/127V-200/115V;

ESP: Standby Power Standby duty, operation under variable load, without over load;

PRP: Prime Power-Continuous duty operation, under variable load 24/24h-10% over load permissible 1 hour/12 hours;

The data is only for your reference but not for use of sales.

M: Mechanical speed governor, E/ECU: Electronic speed governor;

NA: Naturally aspirated, TC: Turbocharged, TCA: Turbocharged and air-air aftercooled, TCW: Water-cooled Turbocharged;

The weights are approximate and without fuel.

GMS100C / GMS100CS

Engine model: 6BT5.9-G2

Typical engine data

Net weight	kg	411
Rotate part instantaneous inertia _ without flywheel	kg.m2	0.25
Distance between gravity center and rear surface of cylinder block	mm	544
Distance between gravity center and center line above of crankshaft	mm	155

Engine installation

Static bent torque permitted—rear surface of cylinder block	N.m	1356
Static bent torque permitted—front surface of cylinder block	N.m	435
Static bent torque permitted—flank surface of cylinder block	N.m	365

Exhaust system

Max. back pressure	mmHg	76
Diameter of exhaust pipe recommended	mm	75

Air intake system

Max. air intake resistance		
Dirty filter	mmH2O	635
Normal air cleaner and clean filter	mmH2O	254
Heavy duty cleaner and clean filter	mmH2O	381
Diameter of intake pipe recommended	mm	100

Lubrication system

Normal oil pressure range		
Low idle	kPa	207
Rated speed	kPa	345
Max. oil temperature permitted in oil pan	°C	121
Oil pan capacity (Max _ Min)	L	14.2_12.3
Lubrication system Min. capacity (oil pan + oil filter)	L	16.4
Usage inclining degree permitted (any direction)	°	40

Fuel system

Fuel injection pump model	A pump _ GAC governor/ BYC ASIMCO	
Max. fuel input resistance of transfer pump	mmHg	102
Max. overflow fuel resistance at overflow pipe of injector	mmHg	254
Total fuel overflow amount	L/h	202

Cooling system

Coolant capacity-engine only	L	9.9
Max. coolant cycling resistance exterior engine	kPa	28
Thermostat adjusting temperature (range)	°C	82_95
Min. opening pressure of radiator cap	kPa	69
Max. coolant temperature permitted _ Standby Power/Base output Power	°C	104/100

Electric system

Starter	12V	24V
Battery charging system	63A	40A
Max. starting circuit resistance	0.00075Ω	0.002Ω
Min. battery capacity_ -12°C (CCA: Cold Cranking Ampere)	800CCA	400CCA

Technical data _ under standard fuel delivery rate FR 91589

	Base output Power	Standby Power
Engine speed _ RPM	1500	1500
Output Power _ kW	86	92
Torque _ Nm	548	586
Low idle _ RPM	750-950	750-950
Friction energy output _ kW	12.7	12.7
Piston speed _ m/s	6.0	6.0
Engine coolant flow _ L/sec	2.0	2.0
Air intake flow _ L/sec	100	108
Exhaust flow _ L/sec	250	280
Exhaust temperature _ °C	526	565
Environment energy output _ kW	N/A	N/A
Coolant energy output _ kW	49	55
Fuel energy output _ kW	N/A	N/A

Alternator model: UC1274C

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.							
A.V.R.	MX321	MX341						
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING					
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)							
CONTROL SYSTEM	SELF EXCITED							
A.V.R.	SX460	AS440						
VOLTAGE REGULATION	± 1.0 %	± 1.0 %	With 4% ENGINE GOVERNING					
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT							
INSULATION SYSTEM	CLASS H							
PROTECTION	IP23							
RATED POWER FACTOR	0.8							
STATOR WINDING	DOUBLE LAYER CONCENTRIC							
WINDING PITCH	TWO THIRDS							
WINDING LEADS	12							
STATOR WDG. RESISTANCE	0.059 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED							
ROTOR WDG. RESISTANCE	1.12 Ohms at 22°C							
EXCITER STATOR RESISTANCE	20 Ohms at 22°C							
EXCITER ROTOR RESISTANCE	0.091 Ohms PER PHASE AT 22°C							
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others							
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
MAXIMUM OVERSPEED	2250 Rev/Min							
BEARING DRIVE END	BALL. 6315-2RS (ISO)							
BEARING NON-DRIVE END	BALL. 6310-2RS (ISO)							
	1 BEARING				2 BEARING			
WEIGHT COMP. GENERATOR	406 kg				420 kg			
WEIGHT WOUND STATOR	131 kg				131 kg			
WEIGHT WOUND ROTOR	133.78 kg				122.82 kg			
WR ² INERTIA	1.0288 kgm ²				0.9781 kgm ²			
SHIPPING WEIGHTS in a crate	439 kg				452 kg			
PACKING CRATE SIZE	105 x 67 x 103(cm)				105 x 67 x 103(cm)			
	50 Hz				60 Hz			
TELEPHONE INTERFERENCE	THF<2%				TIF<50			
COOLING AIR	0.514 m ³ /sec 1090 cfm				0.617 m ³ /sec 1308 cfm			
VOLTAGE SERIES STAR	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
KVA BASE RATING FOR REACTANCE VALUES	100	100	100	N/A	112.5	117.5	117.5	125
X _d DIR. AXIS SYNCHRONOUS	2.45	2.21	2.05	-	2.76	2.58	2.36	2.30
X' _d DIR. AXIS TRANSIENT	0.20	0.18	0.17	-	0.24	0.22	0.21	0.20
X'' _d DIR. AXIS SUBTRANSIENT	0.14	0.13	0.12	-	0.16	0.15	0.14	0.13
X _q QUAD. AXIS REACTANCE	1.59	1.43	1.33	-	1.58	1.48	1.35	1.32
X'' _q QUAD. AXIS SUBTRANSIENT	0.18	0.16	0.15	-	0.23	0.21	0.20	0.19
X _L LEAKAGE REACTANCE	0.07	0.06	0.06	-	0.08	0.07	0.07	0.07
X ₂ NEGATIVE SEQUENCE	0.16	0.14	0.13	-	0.19	0.18	0.16	0.16
X ₀ ZERO SEQUENCE	0.10	0.09	0.08	-	0.12	0.11	0.10	0.10
REACTANCES ARE SATURATED				VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED				
T' _d TRANSIENT TIME CONST.	0.028 s							
T'' _d SUB-TRANSTIME CONST.	0.001 s							
T' _{do} O.C. FIELD TIME CONST.	0.8 s							
T _a ARMATURE TIME CONST.	0.007 s							
SHORT CIRCUIT RATIO	1/X _d							

GMS100C / GMS100CS

Control System PLC-920 (Optional)

PowerLink PLC-920 generator controllers integrating digital, intelligent and network techniques are used as the automatic control systems for diesel generators. It can carry out functions including pre-alarm, warning & electrical trip, fail monitoring and controls etc.

FEATURES

- Parameter configuration via RS-232 serial communication;
- Log last 50 events & alarm information with measured values;
- Statistics records;
- Remote start/stop;
- Speed sensing from alternator voltage or magnetic pickup;
- Configurable 3 inputs and 6 outputs;
- ECU powers, ECU stop, STOP or fuel solenoid selection;
- Automatic transfer switching control and engine control;
- Adjustable start, load and stop timers.



SPECIFICATION

- Dimensions: 111mm*81mm*61mm
- Protection: IP65 at front panel
- Operating temperature: -20 °C to 70 °C
- Max. Operating current is 360mA
- Sender measurement: 0 to 1300 ohm
- Panel cut-out: 81mm*70mm
- Weight: approximately 0.3kg
- DC battery supply voltage: 8 to 32Vdc
- CT secondary: 5A
- Accuracy: 1%FS, resolution: 1 ohm

FUNCTION

- Pre-Alarm
- Engine temperature
- Oil pressure
- Over/under voltage
- Over/under frequency
- Over/under speed
- Warning & Electrical trip
- Over current
- Short circuit
- Error
- Over/under speed
- Speed loss
- Battery low
- Battery high
- Maintenance
- Over current
- Short circuit
- Engine stop
- Can bus
- Charge alternator
- Fail monitoring
- Emergency stop
- Multiple engage fail
- Failed to start
- Low oil pressure
- High temperature
- Speed failure
- Voltage
- Charging fail
- Shutdown
- Warning
- Controls
- Fuel and stop solenoid
- ECU power and stop
- Starter motor
- Automatic generator start
- Preheat
- External alarm horn
- Engine cooling
- Idle mode

Control System function list

MODEL	PLC-920	PLC-7420
General accessory		
AVR	●	●
Electronic Governing	×	×
Glow plug control	●	●
Cycle Cranking	●	●
(MODBUS) Networking	×	●
Fault History	●	●
Operator Interface		
manual start/stop	●	●
Auto/remote start	●	●
Regular Test	●	●
Auto operation LED	●	●
Manual operation LED	●	●
Common Shutdown LED	●	●
Common warning LED	●	●
Fail to start LED	●	●
Emergency stop(local)	●	●
Alphanumeric screen	●	●
Remote start input active LED	×	●
Alarm reset	●	●
Measurement and Instrumentation		
Engine		
Oil pressure	●	●
Water Temperature	●	●
Engine Speed	●	●
Hours Run	●	●
Number of Starts	●	●
Battery Voltage	●	●
Coolant Temperature	●	●
3Phase-L Voltage&Frequency	●	●
3phase Current	●	●
Frequency	●	●
kWh	●	●
Apparent Power	●	●
Active Power and Reactive Power	●	●
Power Factor	●	●
Per PhasekW, kWh	●	●
Per Phase kVA	●	●
Phase Voltage	●	●
Output Power	×	●
Mains Expression		
Grid Line Voltage	×	●
Grid Phase Voltage	×	●
Grid Frequency		●
Shutdown Protection and Indication		
Engine		
Low Fuel Level	●	●
High Fuel Level	×	○
Low Oil Pressure	●	●
High Water Temperature	●	●
Failure to Stop	●	●
Failure to Start	●	●
Controlable start circles/times	×	●
Overspeed	●	●
Alternator		
Under/Over Voltage	●	●
Under/Over Frequency	●	●
Overcurrent	●	●
Earth Leakage	○	○
Reverse Power	×	×
Reverse kWh	×	×
Threshold Warning&Indication		
Low Oil Pressure	●	●
Low Water Temperature	○	○
High Water Temperature	●	●
Low Water Level	●	●
Low/High Battery Voltage	●	●
Failure to Charge	●	●
Overcurrent	●	●
Overload	●	●
Genset Under/Over Voltage	●	●
Genset Under/Over Frequency	●	●
under/over Speed	●	●
High Engine Temperature	●	●
Paralleling Capability		
Earth Leakage	○	○
Synchroscope(Independent Bus)	×	×
Active and Reactive Power Control	×	×
Synchroscope(Shared Bus)	×	×
Synchronization Detector	×	×
Peak Lopping	×	×
Power Transfer Function		
Automatic Transfer	○	●
Hard Closed Transition	●	●
Soft Closed Transition	×	×
Gen/Mains Breaker	×	●
Gen/Mains Breaker Status Protection	×	●
Speed/Voltage Control	×	×
Power Indication	×	●
Fuel&Solenoid Valve Control	●	●
Starter Control	●	●
Preheating	○	○
Mains Transfer Switch (Standard)	×	●
Mains Transfer Switch (Emergency)	×	●
Environment		
Operating Temperature (-40 °C-70 °C)	●	●
Ambient Temperature (-25 °C-45 °C)	●	●
Humidity<=80%	●	●
Monitoring Function		
Grid Over/Under Voltage Control	×	●
Grid Over/Under Frequency Control	×	●
Remote Start Output(Load/No-load)	●	●
Optional Relay Output	●	●
Remote Telecom Control with All Functions	×	●
Engine Instrument Monitoring	●	●
Alternator Output Instrument Monitoring	●	●
Connection Point with All-around Setting For 6 Users	●	●
3 Users Input Connection Point	●	●
LCD Light Control of Low Light Operation Environment	●	●
Safe PIN Code	●	●
RS232/485 Interface	×	●
Language Selection	●	●
Multi-Language Function	●	●

Control System

Digital, intelligent control system allows easier operation.


PLC-7420

PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.



FEATURES

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

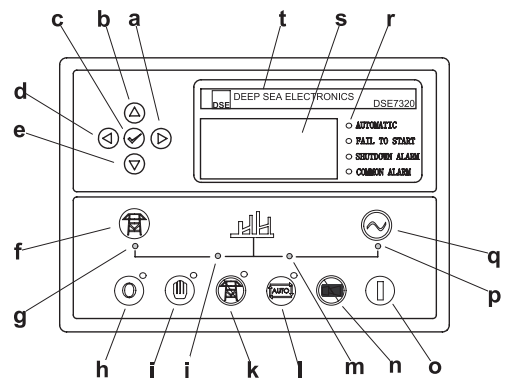


Control Panel

- a Button (next page)
- b Button (increase value / previous item)
- c Button (accept)
- d Button (previous page)
- e Button (decrease value / next item)
- f Button (transfer the load to the mains supply, when in Manual mode only)
- g Mains supply available LED
- h Stop / Reset button
- i Manual button (Manual control mode)
- j Mains supply on load LED
- k Test button (Test mode)
- l Auto button (Auto mode)
- m Genset on load LED
- n Mute/Lamp test button
- o Start button (Manual)
- p Genset available LED
- q Button (transfer the load to the genset, when in Manual mode only)
- r Alarm LED (4 alarm items)
- s LCD display
- t Control module name

Optional

Engine	Alternator	Generator Set	Fuel System	Canopy
<ul style="list-style-type: none"> • Water Jacket Preheater • Oil Preheater 	<ul style="list-style-type: none"> • Winding Temperature Measuring Instrument • Alternator Preheater • PMG • Anti-damp and anti-corrosion treatment • Anti-condensation heater 	<ul style="list-style-type: none"> • Tools with the machine 	<ul style="list-style-type: none"> • Low fuel level alarm • Automatic fuel feeding system • Fuel T-valves 	<ul style="list-style-type: none"> • Trailer
Lubricating System	Exhaust System	Cooling System	Control Panel	Voltages
<ul style="list-style-type: none"> • Oil with the machine 	<ul style="list-style-type: none"> • Protection board from hotness 	<ul style="list-style-type: none"> • Front heat protection • Coolant (-30°C) 	<ul style="list-style-type: none"> • Remote control panel • PLC-920 • PLC-7420 • ATS 	<ul style="list-style-type: none"> • 415/240V • 400/230V • 380/220V • 220/127V • 200-115V

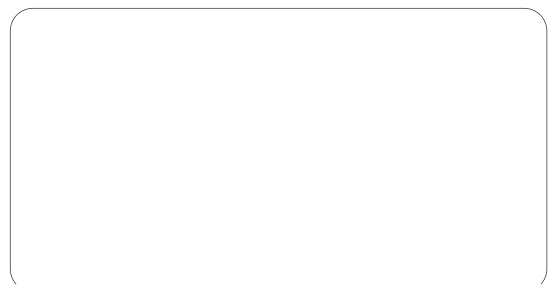

GMS100C / GMS100CS

Features:

- Excitation system: self-excited (AREP and PMG are optional)
- ATS (automatic transfer switch) receptacle
- Lockable battery isolator switch
- Stainless galvanized zinc plates with strong corrosion resistance
- Vibration isolators between the engine/alternator and base frame
- Integrated wiring design
- Base fuel tank for at least 8 hours running
- Equipped with an industrial muffler
- Engine oil pump
- 50 C radiator
- Top lifting and steel base frame with forklift holes
- Drainage for fuel tank
- Complete protection functions and safety labels
- IP54 (soundproof sets), IP56 (control system)
- Water jacket preheater, oil heater and double air cleaner, etc. are available.



Output Ratings

Generating Set Model	Prime	Standby
GMS100C/S	100kVA/80kW	110kVA/88kW

Ratings at 0.8 power factor.


Ratings and Performance Data

Engine Make & Model:	6BT5.9-G1	
Alternator Model:	UCI274C	
Alternator Brand:	STAMFORD	
Control System:	PLC-920 / PLC-7420	
Noise Level@7m:	63.1-73.4	
Frequency & Phase:	50Hz & 3PH	
Engine Speed: RPM	1500	
Structure Type:	GMS100C	A
	GMS100CS	R
Fuel Tank Capacity: L	GMS100C	380
	GMS100CS	250
Fuel Consumption: l/hr (100% Load)	Prime	22
	Standby	25

Dimensions and Weights

Generating Set Model	Length (L) mm (in)	Width (W) mm (in)	Height (H) mm (in)	Dry kg (lb)
GMS100C	2110	891	1530	1221
GMS100CS	3038	1197	1797	1995

Dry = With Lube Oil Wet = With Lube Oil and Coolant

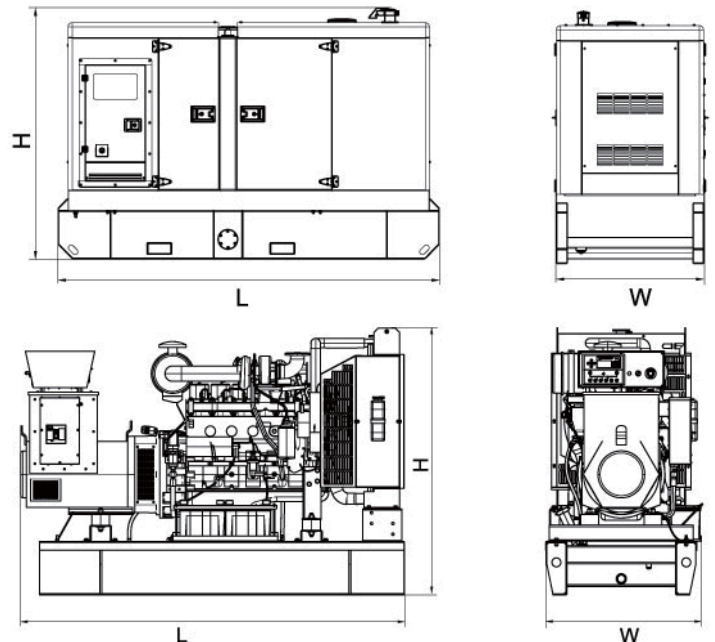

Also available in the following voltages: 415/240V-380/220V-220/127V-200/115V;

ESP: Standby Power Standby duty, operation under variable load, without over load;

PRP: Prime Power-Continuous duty operation, under variable load 24/24h-10% over load permissible 1 hour/12 hours;

The data is only for your reference but not for use of sales.

M: Mechanical speed governor, E/EUCU: Electronic speed governor;

NA: Naturally aspirated, TC: Turbocharged, TCA: Turbocharged and air-air aftercooled, TCW: Water-cooled Turbocharged;

The weights are approximate and without fuel.

GMS100C / GMS100CS

Engine model: 6BT5.9-G1

Typical engine data

Net weight	kg	411
Rotate part instantaneous inertia _ without flywheel	kg.m ²	0.25
Distance between gravity center and rear surface of cylinder block	mm	544
Distance between gravity center and center line above of crankshaft	mm	155

Engine installation

Static bent torque permitted—rear surface of cylinder block	N.m	1356
Static bent torque permitted—front surface of cylinder block	N.m	435
Static bent torque permitted—flank surface of cylinder block	N.m	365

Exhaust system

Max. back pressure	mmHg	76
Diameter of exhaust pipe recommended	mm	75

Air intake system

Max. air intake resistance		
Dirty filter	mmH ₂ O	635
Normal air cleaner and clean filter	mmH ₂ O	254
Heavy duty cleaner and clean filter	mmH ₂ O	381
Diameter of intake pipe recommended	mm	100

Lubrication system

Normal oil pressure range		
Low idle	kPa	207
Rated speed	kPa	345
Max. oil temperature permitted in oil pan	°C	121
Oil pan capacity (Max _ Min)	L	14.2_12.3
Lubrication system Min. capacity (oil pan + oil filter)	L	16.4
Usage inclining degree permitted (any direction)	°	40

Fuel system

Fuel injection pump model	WeiFu A pump with RSV Mechanical governor	
Max. fuel input resistance of transfer pump	mmHg	102
Max. overflow fuel resistance at overflow pipe of injector	mmHg	254
Total fuel overflow amount	L/h	30

Cooling system

Coolant capacity-engine only	L	9.9
Max. coolant cycling resistance exterior engine	kPa	28
Thermostat adjusting temperature (range)	°C	82_95
Min. opening pressure of radiator cap	kPa	69
Max. coolant temperature permitted _ Standby Power/Base output Power	°C	104/100

Electric system

Starter	12V	24V
Battery charging system	63A	40A
Max. starting circuit resistance	0.00075Ω	0.002Ω
Min. battery capacity_ -12°C (CCA: Cold Cranking Ampere)	800CCA	400CCA

Technical data _ under standard fuel delivery rate FR 91589

	Base output Power	Standby Power
Engine speed _ RPM	1500	1500
Output Power _ kW	86	92
Torque _ Nm	548	586
Low idle _ RPM	950-1050	950-1050
Friction energy output _ kW	12.7	12.7
Piston speed _ m/s	6.0	6.0
Engine coolant flow _ L/sec	2.0	2.0
Air intake flow _ L/sec	100	108
Exhaust flow _ L/sec	250	280
Exhaust temperature _ °C	526	565
Environment energy output _ kW	N/A	N/A
Coolant energy output _ kW	49	55
Fuel energy output _ kW	N/A	N/A

All data's error within ±5%.

GMS100C / GMS100CS

Alternator model: UC1274C

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.		
A.V.R.	MX321	MX341	
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)		

CONTROL SYSTEM	SELF EXCITED		
A.V.R.	SX460	AS440	
VOLTAGE REGULATION	± 1.0 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT		

INSULATION SYSTEM	CLASS H		
PROTECTION	IP23		
RATED POWER FACTOR	0.8		
STATOR WINDING	DOUBLE LAYER CONCENTRIC		
WINDING PITCH	TWO THIRDS		
WINDING LEADS	12		
STATOR WDG. RESISTANCE	0.059 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED		
ROTOR WDG. RESISTANCE	1.12 Ohms at 22°C		
EXCITER STATOR RESISTANCE	20 Ohms at 22°C		
EXCITER ROTOR RESISTANCE	0.091 Ohms PER PHASE AT 22°C		
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others		
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%		
MAXIMUM OVERSPEED	2250 Rev/Min		
BEARING DRIVE END	BALL. 6315-2RS (ISO)		
BEARING NON-DRIVE END	BALL. 6310-2RS (ISO)		

	1 BEARING	2 BEARING
WEIGHT COMP. GENERATOR	406 kg	420 kg
WEIGHT WOUND STATOR	131 kg	131 kg
WEIGHT WOUND ROTOR	133.78 kg	122.82 kg
WR ² INERTIA	1.0288 kgm ²	0.9781 kgm ²
SHIPPING WEIGHTS in a crate	439 kg	452 kg
PACKING CRATE SIZE	105 x 67 x 103(cm)	105 x 67 x 103(cm)

	50 Hz				60 Hz			
TELEPHONE INTERFERENCE	THF<2%				TIF<50			
COOLING AIR	0.514 m³/sec 1090 cfm				0.617 m³/sec 1308 cfm			
VOLTAGE SERIES STAR	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
KVA BASE RATING FOR REACTANCE VALUES	100	100	100	N/A	112.5	117.5	117.5	125
X _d DIR. AXIS SYNCHRONOUS	2.45	2.21	2.05	-	2.76	2.58	2.36	2.30
X' _d DIR. AXIS TRANSIENT	0.20	0.18	0.17	-	0.24	0.22	0.21	0.20
X'' _d DIR. AXIS SUBTRANSIENT	0.14	0.13	0.12	-	0.16	0.15	0.14	0.13
X _q QUAD. AXIS REACTANCE	1.59	1.43	1.33	-	1.58	1.48	1.35	1.32
X'' _q QUAD. AXIS SUBTRANSIENT	0.18	0.16	0.15	-	0.23	0.21	0.20	0.19
X _L LEAKAGE REACTANCE	0.07	0.06	0.06	-	0.08	0.07	0.07	0.07
X ₂ NEGATIVE SEQUENCE	0.16	0.14	0.13	-	0.19	0.18	0.16	0.16
X ₀ ZERO SEQUENCE	0.10	0.09	0.08	-	0.12	0.11	0.10	0.10

REACTANCES ARE SATURATED	VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED
T' _d TRANSIENT TIME CONST.	0.028 s
T'' _d SUB-TRANSTIME CONST.	0.001 s
T' _{do} O.C. FIELD TIME CONST.	0.8 s
T _a ARMATURE TIME CONST.	0.007 s
SHORT CIRCUIT RATIO	1/X _d

GMS100C / GMS100CS

Control System PLC-920 (Optional)

PowerLink PLC-920 generator controllers integrating digital, intelligent and network techniques are used as the automatic control systems for diesel generators. It can carry out functions including pre-alarm, warning & electrical trip, fail monitoring and controls etc.

FEATURES

- Parameter configuration via RS-232 serial communication;
- Log last 50 events & alarm information with measured values;
- Statistics records;
- Remote start/stop;
- Speed sensing from alternator voltage or magnetic pickup;
- Configurable 3 inputs and 6 outputs;
- ECU powers, ECU stop, STOP or fuel solenoid selection;
- Automatic transfer switching control and engine control;
- Adjustable start, load and stop timers.



SPECIFICATION

- Dimensions: 111mm*81mm*61mm
- Protection: IP65 at front panel
- Operating temperature: -20 °C to 70 °C
- Max. Operating current is 360mA
- Sender measurement: 0 to 1300 ohm
- Panel cut-out: 81mm*70mm
- Weight: approximately 0.3kg
- DC battery supply voltage: 8 to 32Vdc
- CT secondary: 5A
- Accuracy: 1%FS, resolution: 1 ohm

FUNCTION

- Pre-Alarm
- Engine temperature
- Oil pressure
- Over/under voltage
- Over/under frequency
- Over/under speed
- Warning & Electrical trip
- Over current
- Short circuit
- Error
- Over/under speed
- Speed loss
- Battery low
- Battery high
- Maintenance
- Over current
- Short circuit
- Engine stop
- Can bus
- Charge alternator
- Fail monitoring
- Emergency stop
- Multiple engage fail
- Failed to start
- Low oil pressure
- High temperature
- Speed failure
- Voltage
- Charging fail
- Shutdown
- Warning
- Controls
- Fuel and stop solenoid
- ECU power and stop
- Starter motor
- Automatic generator start
- Preheat
- External alarm horn
- Engine cooling
- Idle mode

Control System function list				
	MODEL	PLC-920	PLC-7420	
General accessory	AVR	●	●	
	Electronic Governing	×	×	
	Glow plug control	●	●	
	Cycle Cranking	●	●	
	(MODBUS) Networking	×	●	
	Fault History	●	●	
Operator Interface	manual start/stop	●	●	
	Auto/remote start	●	●	
	Regular Test	●	●	
	Auto operation LED	●	●	
	Manual operation LED	●	●	
	Common Shutdown LED	●	●	
	Common warning LED	●	●	
	Fail to start LED	●	●	
	Emergency stop(local)	●	●	
	Alphanumeric screen	●	●	
Measurement and Instrumentation	Remote start input active LED	×	●	
	Alarm reset	●	●	
	Engine	Oil pressure	●	●
		Water Temperature	●	●
		Engine Speed	●	●
		Hours Run	●	●
	Alternator	Number of Starts	●	●
		Battery Voltage	●	●
		Coolant Temperature	●	●
		3Phase-L Voltage&Frequency	●	●
		3phase Current	●	●
		Frequency	●	●
		kWh	●	●
		Apparent Power	●	●
Active Power and Reactive Power		●	●	
Power Factor		●	●	
Per PhasekW, kWh	●	●		
Mains Expression	Per Phase kVA	●	●	
	Phase Voltage	●	●	
	Output Power	×	●	
	Grid Line Voltage	×	●	
Shutdown Protection and Indication	Grid Phase Voltage	×	●	
	Grid Frequency	×	●	
	Engine	Low Fuel Level	●	●
		High Fuel Level	×	○
		Low Oil Pressure	●	●
		High Water Temperature	●	●
	Alternator	Failure to Stop	●	●
		Failure to Start	●	●
		Controllable start circles/times	×	●
		Overspeed	●	●
Under/Over Voltage		●	●	
Under/Over Frequency		●	●	
Threshold Warning/Indication	Overcurrent	●	●	
	Earth Leakage	○	○	
	Reverse Power	×	×	
	Reverse kWh	×	×	
	Low Oil Pressure	●	●	
	Low Water Temperature	○	○	
	High Water Temperature	●	●	
	Low Water Level	●	●	
	Low/High Battery Voltage	●	●	
	Failure to Charge	●	●	
Paralleling Capability	Overcurrent	●	●	
	Overload	●	●	
	Genset Under/Over Voltage	●	●	
	Genset Under/Over Frequency	●	●	
	under/over Speed	●	●	
	High Engine Temperature	●	●	
	Earth Leakage	○	○	
	Synchroscope(Independent Bus)	×	×	
	Active and Reactive Power Control	×	×	
	Synchroscope(Shared Bus)	×	×	
Power Transfer Function	Synchronization Detector	×	×	
	Peak Lopping	×	×	
	Automatic Transfer	○	●	
	Hard Closed Transition	●	●	
	Soft Closed Transition	×	×	
	Gen/Mains Breaker	×	●	
	Gen/Mains Breaker Status Protection	×	●	
	Speed/Voltage Control	×	×	
	Power Indication	×	●	
	Fuel&Solenoid Valve Control	●	●	
Environment	Starter Control	●	●	
	Preheating	○	○	
	Mains Transfer Switch (Standard)	×	●	
	Mains Transfer Switch (Emergency)	×	●	
	Operating Temperature (-40 °C-70 °C)	●	●	
	Ambient Temperature (-25 °C-45 °C)	●	●	
	Humidity<=80%	●	●	
	Monitoring Function	Grid Over/Under Voltage Control	×	●
		Grid Over/Under Frequency Control	×	●
		Remote Start Output(Load/No-load)	●	●
Optional Relay Output		●	●	
Remote Telecom Control with All Functions		×	●	
Engine Instrument Monitoring		●	●	
Alternator Output Instrument Monitoring		●	●	
Connection Point with All-around Setting For 6 Users		●	●	
3 Users Input Connection Point		●	●	
LCD Light Control of Low Light Operation Environment		●	●	
Monitoring Function	Safe PIN Code	●	●	
	RS232/485 Interface	×	●	
	Language Selection	●	●	
	Multi-Language Function	●	●	

Control System

Digital, intelligent control system allows easier operation.


PLC-7420

PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.



FEATURES

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

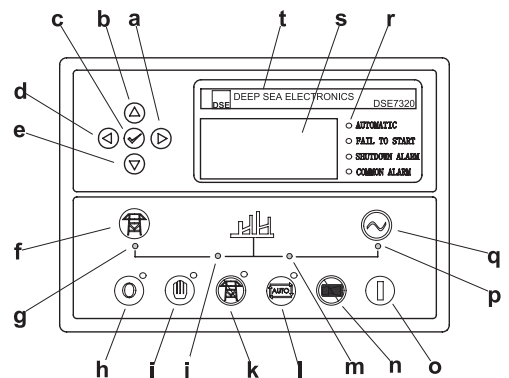

Control Panel

- a Button (next page)
- b Button (increase value / previous item)
- c Button (accept)
- d Button (previous page)
- e Button (decrease value / next item)
- f Button (transfer the load to the mains supply, when in Manual mode only)
- g Mains supply available LED
- h Stop / Reset button
- i Manual button (Manual control mode)
- j Mains supply on load LED
- k Test button (Test mode)
- l Auto button (Auto mode)
- m Genset on load LED
- n Mute/Lamp test button
- o Start button (Manual)
- p Genset available LED
- q Button (transfer the load to the genset, when in Manual mode only)
- r Alarm LED (4 alarm items)
- s LCD display
- t Control module name

Optional

Engine	Alternator	Generator Set	Fuel System	Canopy
<ul style="list-style-type: none"> • Water Jacket Preheater • Oil Preheater 	<ul style="list-style-type: none"> • Winding Temperature Measuring Instrument • Alternator Preheater • PMG • Anti-damp and anti-corrosion treatment • Anti-condensation heater 	<ul style="list-style-type: none"> • Tools with the machine 	<ul style="list-style-type: none"> • Low fuel level alarm • Automatic fuel feeding system • Fuel T-valves 	<ul style="list-style-type: none"> • Trailer
Lubricating System	Exhaust System	Cooling System	Control Panel	Voltages
<ul style="list-style-type: none"> • Oil with the machine 	<ul style="list-style-type: none"> • Protection board from hotness 	<ul style="list-style-type: none"> • Front heat protection • Coolant (-30°C) 	<ul style="list-style-type: none"> • Remote control panel • PLC-920 • PLC-7420 • ATS 	<ul style="list-style-type: none"> • 415/240V • 400/230V • 380/220V • 220/127V • 200-115V

