

# GMS60C/S

## EC Series

### Features:

- Rotate speed governor: Electrical governor S6700E
- Excitation system: Self excited
- A.V.R model: AS440
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 2x12V sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy (Only for Soundproofed sets)
- 50°C radiator
- Oil pump on the engine
- Steel base frame with fork holes
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for daily running
- Drain points for fuel tank
- Operation Manual / Specifications



### Output Ratings

| Generating Set Model | Prime Power | Standby Power |
|----------------------|-------------|---------------|
| <b>GMS60C</b>        | 60kVA/48kW  | 61kVA/48.8kW  |
| <b>GMS60CS</b>       | 60kVA/48kW  | 61kVA/48.8kW  |

Ratings at 0.8 power factor

### Dimensions and Weights

| Model          | Length (L)<br>mm | Width (W)<br>mm | Height (H)<br>mm | Dry Weight<br>kg |
|----------------|------------------|-----------------|------------------|------------------|
| <b>GMS60C</b>  | 1842             | 797             | 1437             | 918              |
| <b>GMS60CS</b> | 2650             | 1050            | 1550             | 1547             |

#### Notes:

##### \*Prime Power

Continuous duty operation, under variable load 24/24h-10% over load permissible 1 hour/12 hours;

##### \*\*Standby Power

Standby duty, operation under variable load, without over load;


##### Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m(328 ft) A.S.L. 30% relative humidity.

Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

### Ratings and Performance Data

|   |                    |
|---|--------------------|
| <b>Engine Make &amp; Model:</b>           | Cummins 4BTA3.9-G2 |
| <b>Alternator Brand:</b>                  | Stamford           |
| <b>Alternator Model:</b>                  | UCI224E            |
| <b>Control System:</b>                    | Auto Gen / AMF     |
| <b>Circuit Breaker Type:</b>              | 3 Pole MCCB        |
| <b>Frequency &amp; Phase:</b>             | 50Hz & 3PH         |
| <b>Engine Speed: RPM</b>                  | 1500               |
| <b>Fuel Tank Capacity: L</b>              |                    |
| <b>GMS60C</b>                             | 226                |
| <b>GMS60CS</b>                            | 240                |
| <b>Fuel Consumption: l/hr (100% Load)</b> |                    |
| <b>- Prime Power</b>                      | 13.1               |
| <b>- Standby Power</b>                    | 14.7               |

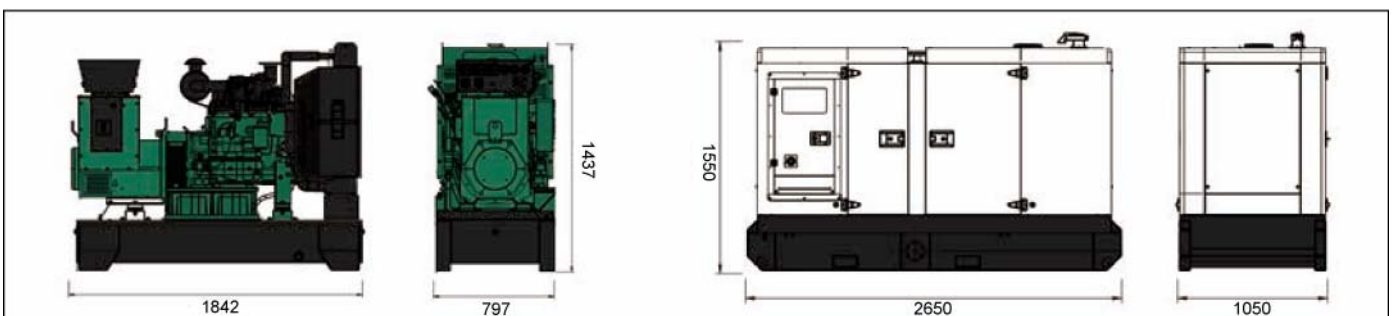

### Engine model:4BTA3.9-G2

| Engine Technical Data               |              |
|-------------------------------------|--------------|
| No. of Cylinders / Alignment:       | 4 / In Line  |
| Cycle:                              | 4 Stroke     |
| Bore / Stroke: mm                   | 102/120      |
| Induction:                          | Turbocharged |
| Cooling Method:                     | Water        |
| Governing Type:                     | Mechanical   |
| Governing Class:                    | ISO 8528 G2  |
| Compression Ratio:                  | 16.5:1       |
| Displacement: L                     | 3.9          |
| Moment of Inertia:kg.m <sup>2</sup> | 0.143        |
| Engine Electrical System:           |              |
| - Voltage / Ground                  | 12/Negative  |
| - Battery Charger                   | 63 Amp       |
| Weight: kg                          |              |
| - Dry                               | 350          |
| - Wet                               |              |

| Cooling System   |         |
|--|---------|
| Cooling System Capacity: L                                       | 7.9     |
| Maximum coolant Friction Head External to Engine: kPa            | 28      |
| Maximum Static Head of Coolant Above Engine Crank Centerline : m | 14      |
| Standard Thermostat (Modulating) Range: °C                       | 82-95   |
| Minimum Pressure Cap: kPa  | 69      |
| Maximum Top Tank Temperature for Standby / prime Power: °C       | 104/100 |

Designed to operate in ambient conditions up to 50°C (122°F). Contact your local Power Link Dealer for power ratings at specific site conditions

| Performance             |      |
|-------------------------|------|
| Engine Speed: rpm       | 1500 |
| Gross Engine Power: kWm |      |
| - Prime                 | 50   |
| - Standby               | 55   |
| BMEP: kPa               |      |
| - Prime                 |      |
| - Standby               |      |

| Fuel System  |           |           |          |          |
|--|-----------|-----------|----------|----------|
| Injection System Type: NYC A pump with GAC governor    |           |           |          |          |
| Recommended Fuel Type:<br>Diesel Fuel No.2-D(ASTMD975) |           |           |          |          |
| Fuel Consumption: l/hr                                 |           |           |          |          |
| Prime  | 110% Load | 100% Load | 75% Load | 50% Load |
| GMS60C   | 14.7      | 13.1      | 9.8      | 6.7      |
| GMS60CS  | 14.7      | 13.1      | 9.8      | 6.7      |

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869,Class A2)

| Lubrication System            |                  |
|-------------------------------|------------------|
| Oil Pressure @ Idle Speed kPa | 207              |
| @ Rated Speed kPa             | 345              |
| Maximum Oil Temperature: °C   | 121              |
| Total Oil Capacity: L         | 10.9             |
| Oil Type:                     | API CH4 / 15W-40 |

| Exhaust System                       |            |
|--------------------------------------|------------|
| Silencer Type                        | Industrial |
| Silencer Quantity:                   | 1          |
| Silencer Noise Reduction Level:      | 15-20dBA   |
| Maximum Allowable Back Pressure:mmhg | 76         |
| Exhaust Gas Flow: l/s                |            |
| - Prime                              | 130        |
| - Standby                            | 155        |
| Exhaust Gas Temperature: °C          |            |
| - Prime                              | 460        |
| - Standby                            | 485        |

| Air Systems                                     |                              |
|---|------------------------------|
| Air Filter Type:                                | Dry type replaceable Element |
| Intake Air Flow: l/s                            |                              |
| - Prime   | 32.8                         |
| - Standby                                       | 32.9                         |
| Max. Air Intake Restriction: mmH <sub>2</sub> O |                              |
| -With Dirty Filter Element                      | 508                          |
| -With Normal Duty and Clean Filter Element      | 254                          |
| -With Heavy Duty and Clean Filter Element       | 305                          |

### Alternator model:UCI224E

| Alternator Physical Data   |              |
|----------------------------|--------------|
| Manufactured by:           | Stamford     |
| Model:                     | UCI224E      |
| No. of Bearings:           | Single       |
| Insulation Class:          | H            |
| Winding Pitch Code:        | 2/3          |
| Wires:                     | 12           |
| Ingress Protection Rating: | IP23         |
| Excitation System:         | Self excited |
| AVR Model:                 | AS440        |

| Alternator Operating Data          |         |
|------------------------------------|---------|
| Overspeed: rpm                     | 2250rpm |
| Voltage Regulation: (Steady state) | ±1.0%   |
| Wave Form NEMA = TIF:              | < 50    |
| Wave Form IEC = THF:               | < 2%    |
| Air Flow: m <sup>3</sup> /s        | 0.1     |
| Altitude: m                        | ≤1000   |

| Alternator Performance Data: | GMS60C | GMS60CS |      |
|------------------------------|--------|---------|------|
| Time constants/400V:Ms       | T'd    | 28      | 28   |
|                              | T''d   | 7       | 7    |
|                              | T'do   | 700     | 700  |
|                              | Ta     | 6       | 6    |
| Short Circuit Capacity** %   | 701Xd  | 1Xd     |      |
| Reactances: Per Unit         | Xd     | 2.24    | 2.24 |
|                              | X'd    | 0.17    | 0.17 |
|                              | X''d   | 0.12    | 0.12 |

| Voltage Technical Data GMS60C |        |      |          |      |
|-------------------------------|--------|------|----------|------|
| Voltage                       | Prime: |      | Standby: |      |
|                               | kVA    | kW   | kVA      | kW   |
| 380/220                       | 53.0   | 42.4 | 61.0     | 48.8 |
| 400/230                       | 53.0   | 42.4 | 61.0     | 48.8 |
| 415/240                       | 53.0   | 42.4 | 61.0     | 48.8 |
| 440/254                       | 40.3   | 32.2 | 45.8     | 36.6 |
|                               |        |      |          |      |
|                               |        |      |          |      |
|                               |        |      |          |      |
|                               |        |      |          |      |

| Voltage Technical Data GMS60CS |        |      |          |      |
|--------------------------------|--------|------|----------|------|
| Voltage                        | Prime: |      | Standby: |      |
|                                | kVA    | kW   | kVA      | kW   |
| 380/220                        | 53.0   | 42.4 | 61.0     | 48.8 |
| 400/230                        | 53.0   | 42.4 | 61.0     | 48.8 |
| 415/240                        | 53.0   | 42.4 | 61.0     | 48.8 |
| 440/254                        | 40.3   | 32.2 | 45.8     | 36.6 |
|                                |        |      |          |      |
|                                |        |      |          |      |
|                                |        |      |          |      |
|                                |        |      |          |      |

# ControlSystem

## PLC-7420 (Optional)

### FEATURES

- Microprocessor control, with high stability and credibility .
- Mains supply and generator operation monitoring.
- Indicating operation status and fault conditions.
- Multiple protections; multiple parameters display, such as pressure, temperature.
- Manual and automatic work mode selectable.
- Real time clock for time and date display, overall runtime display, 99 log entries
- Overall power output display.
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed.
- Communication with PC via RS485 or RS232 interface, using MODBUS protocol.
- Engine ECU is available.
- Common USB cable is usable for parameter configuration.
- Multi-language is available.



## PLC-920

### FEATURES

- Parameter configuration via RS-232 serial communication;
- Log last 50 events & alarm information with measured values;
- Statistics records;
- Remote start/stop;
- Speed sensing from alternator voltage or magnetic pickup;
- Configurable 3 inputs and 6 outputs;
- ECU powers, ECU stop, STOP or fuel solenoid selection;
- Automatic transfer switching control and engine control;
- Adjustable start, load and stop timers.



| Diesel Generator Sets 6-2250 kVA   |  | PLC-7420                    | PLC-920 |   |
|------------------------------------|--|-----------------------------|---------|---|
| General accessory                  | AVR  | ●                           | ●       |   |
|                                    | Electronic Governing                                 | ×                           | ×       |   |
|                                    | Glow plug control                                    | ●                           | ●       |   |
|                                    | Cycle Cranking                                       | ●                           | ●       |   |
|                                    | (MODBUS) Networking                                  | ●                           | ×       |   |
| Operator interface                 | Fault History  | ●                           | ●       |   |
|                                    | Manual start/stop                                    | ●                           | ●       |   |
|                                    | Auto/remote start                                    | ●                           | ●       |   |
|                                    | Regular Test   | ●                           | ●       |   |
|                                    | Auto operation LED                                   | ●                           | ●       |   |
|                                    | Manual operation LED                                 | ●                           | ●       |   |
|                                    | Common Shutdown LED                                  | ●                           | ●       |   |
|                                    | Common warning LED                                   | ●                           | ●       |   |
|                                    | Fail to start LED                                    | ●                           | ●       |   |
|                                    | (Emergency stop/local)                               | ●                           | ●       |   |
| Measurement and Instrumentation    | Alphanumeric screen                                  | ●                           | ●       |   |
|                                    | Remote start input active LED                        | ●                           | ×       |   |
|                                    | Alarm reset  | ●                           | ●       |   |
|                                    | Engine   | Oil pressure                | ●       | ● |
|                                    |  | Water Temperature           | ●       | ● |
|                                    |  | Engine Speed                | ●       | ● |
|                                    |  | Hours Run                   | ●       | ● |
|                                    |  | Number of Starts            | ●       | ● |
|                                    | Alternator   | Battery Voltage             | ●       | ● |
|                                    |  | Coolant Temperature         | ●       | ● |
|                                    |  | 3Phase L1 Voltage&Frequency | ●       | ● |
|                                    |  | 3phase Current              | ●       | ● |
|                                    |  | Frequency                   | ●       | ● |
|                                    |  | kWh                         | ●       | ● |
|                                    |  | Apparent Power              | ●       | ● |
| Active Power and Reactive Power    |  | ●                           | ●       |   |
| Power Factor                       |  | ●                           | ●       |   |
| Per PhasekW, kVAr                  |  | ●                           | ●       |   |
| Per Phase kVA                      | ●  | ●                           |         |   |
| Main Expression                    | Phase Voltage  | ●                           | ●       |   |
|                                    | Output Power   | ●                           | ×       |   |
|                                    | Grid Line Voltage                                    | ●                           | ×       |   |
|                                    | Grid Phase Voltage                                   | ●                           | ×       |   |
|                                    | Grid Frequency                                       | ●                           | ×       |   |
| Shutdown Protection and Indication | Engine   | ●                           | ●       |   |
|                                    | Low Fuel Level                                       | ●                           | ●       |   |
|                                    | High Fuel Level                                      | ○                           | ×       |   |
|                                    | Low Oil Pressure                                     | ●                           | ●       |   |
|                                    | High Water Temperature                               | ●                           | ●       |   |
|                                    | Failure to Stop                                      | ●                           | ●       |   |
|                                    | Failure to Start                                     | ●                           | ●       |   |
|                                    | Controllable start circles/times                     | ●                           | ×       |   |
|                                    | Overspeed  | ●                           | ●       |   |
|                                    | Under/Over Voltage                                   | ●                           | ●       |   |
| Alternator                         | Under/Over Frequency                                 | ●                           | ●       |   |
|                                    | Overcurrent  | ●                           | ●       |   |
|                                    | Earth Leakage  | ○                           | ○       |   |
|                                    | Reverse Power  | ×                           | ×       |   |
|                                    | Reverse kWh  | ×                           | ×       |   |
| Threshold Warning/Indication       | Low Oil Pressure                                     | ●                           | ●       |   |
|                                    | Low Water Temperature                                | ○                           | ○       |   |
|                                    | High Water Temperature                               | ●                           | ●       |   |
|                                    | Low Water Level                                      | ●                           | ●       |   |
|                                    | Low/High Battery Voltage                             | ●                           | ●       |   |
|                                    | Failure to Charge                                    | ●                           | ●       |   |
|                                    | Overcurrent  | ●                           | ●       |   |
|                                    | Overload   | ●                           | ●       |   |
|                                    | Genset Under/Over Voltage                            | ●                           | ●       |   |
|                                    | Genset Under/Over Frequency                          | ●                           | ●       |   |
| under/over Speed                   | ●  | ●                           |         |   |
| Paralleling Capability             | High Engine Temperature                              | ●                           | ●       |   |
|                                    | Earth Leakage  | ○                           | ○       |   |
|                                    | Synchronop(Independent Bus)                          | ×                           | ×       |   |
|                                    | Active and Reactive Power Control                    | ×                           | ×       |   |
|                                    | Synchronop(Shared Bus)                               | ×                           | ×       |   |
| Power Transfer Function            | Synchronization Detector                             | ×                           | ×       |   |
|                                    | Peak Lipping   | ×                           | ×       |   |
|                                    | Automatic Transfer                                   | ●                           | ○       |   |
|                                    | Hard Closed Transition                               | ●                           | ○       |   |
|                                    | Soft Closed Transition                               | ×                           | ×       |   |
|                                    | Gen/Main Breaker                                     | ●                           | ×       |   |
|                                    | Gen/Main Breaker Status Protection                   | ●                           | ×       |   |
|                                    | Speed/Voltage Control                                | ×                           | ×       |   |
|                                    | Power Indication                                     | ●                           | ×       |   |
|                                    | Fuel&Solenoid Valve Control                          | ●                           | ●       |   |
| Environment                        | Starter Control                                      | ●                           | ●       |   |
|                                    | Preheating   | ○                           | ○       |   |
|                                    | Main Transfer Switch (Standard)                      | ●                           | ×       |   |
|                                    | Main Transfer Switch (Emergency)                     | ●                           | ×       |   |
|                                    | Operating Temperature (-40℃~70℃)                     | ●                           | ●       |   |
| Monitoring Function                | Ambient Temperature (-25℃~45℃)                       | ●                           | ●       |   |
|                                    | Humidity ≤ 80%                                       | ●                           | ●       |   |
|                                    | Grid Over/Under Voltage Control                      | ●                           | ×       |   |
|                                    | Grid Over/Under Frequency Control                    | ●                           | ×       |   |
|                                    | Remote Start Output(Load/No-load)                    | ●                           | ●       |   |
|                                    | Optional Relay Output                                | ●                           | ●       |   |
|                                    | Remote Telecom Control with All Functions            | ●                           | ×       |   |
|                                    | Engine Instrument Monitoring                         | ●                           | ●       |   |
|                                    | Alternator Output Instrument Monitoring              | ●                           | ●       |   |
|                                    | Connection Point with All-around Setting For 6 Users | ●                           | ●       |   |
| 3 Users Input Connection Point     | ●  | ●                           |         |   |
| Monitoring Function                | LCD Light Control of Low Light Operation Environment | ●                           | ●       |   |
|                                    | Safe PIN Code  | ●                           | ●       |   |
|                                    | RS232/485 Interface                                  | ●                           | ×       |   |
|                                    | Language Selection                                   | ●                           | ●       |   |
|                                    | Multi-Language Function                              | ●                           | ●       |   |

● Standard ○ Optional × Impossible

### Optional

| Engine  | Alternator   | Generator Set  | Fuel System   | Canopy  |
|---|--|--|---|---|
| <ul style="list-style-type: none"> <li>Water Jacket Preheater</li> <li>Oil Preheater</li> </ul> | <ul style="list-style-type: none"> <li>Winding Temperature</li> <li>Measuring Instrument</li> <li>Alternator Preheater</li> <li>PMG</li> <li>Anti-damp and anti-corrosion treatment</li> <li>Anti-condensation heater</li> </ul> | <ul style="list-style-type: none"> <li>Tools with the machine</li> </ul> | <ul style="list-style-type: none"> <li>Low fuel level alarm</li> <li>Automatic fuel feedingsystem</li> <li>Fuel T-valves</li> </ul> | <ul style="list-style-type: none"> <li>Trailer</li> </ul> |

| Lubricating System   | Exhaust System  | Cooling System   | Control System  | Voltages  |
|--|---|--|---|---|
| <ul style="list-style-type: none"> <li>Oil with the machine</li> </ul> | <ul style="list-style-type: none"> <li>Protection board from hotness</li> </ul> | <ul style="list-style-type: none"> <li>Front heat protection</li> <li>Coolant (-30°C)</li> </ul> | <ul style="list-style-type: none"> <li>Remote control panel</li> <li>PLC-7420</li> <li>ATS</li> </ul> | <ul style="list-style-type: none"> <li>415/240V</li> <li>400/230V</li> <li>380/220</li> <li>220/127V</li> <li>200-115V</li> </ul> |

The following lists are optional by the needs of customers.

| 4B Series 1000 Hour Maintaining List |                          |                    |     |         |
|--------------------------------------|--------------------------|--------------------|-----|---------|
| No.                                  | Part Name                | Part No.           | Qty | Remark  |
| 1                                    | CARTRIDGE,LUB            | 1012Q-010(3908616) | 5   |         |
| 2                                    | FILTER,FUEL              | C3931063           | 5   |         |
| 3                                    | WATER FUEL SEPERATOR     | C3930942           | 5   |         |
| 4                                    | CLEANER, AIR             | kw1524             | 5   |         |
| 5                                    | BELT,V RIBBED            | C3288790           | 2   |         |
| 6                                    | FRONT FUEL SEAL          | C4991305           | 1   |         |
| 7                                    | REAR FUEL SEAL           | C4982415           | 1   |         |
| 8                                    | BEARING,CRANKSHAFT THRUS | A3906230           | 1   |         |
| 9                                    | BEARING,MAIN, UPPER      | C3929016           | 4   |         |
| 10                                   | BEARING,MAIN, BOTTOM     | C3929021           | 5   |         |
| 11                                   | BEARING,CONNECTING ROD   | A3901170           | 8   |         |
| 12                                   | GASKET,VALVE COVER       | C3930906           | 8   |         |
| 13                                   | GASKET,SYLINDER          | 3921393.00         | 1   |         |
| 14                                   | AIR RING, PISTON         | 3918315.00         | 4   | ONE SET |
| 15                                   | MID RING, PISTON         | 3904531.00         | 4   |         |
| 16                                   | OIL RING, PISTON         | 3932520.00         | 4   |         |
| 17                                   | NOZZLE TIP               | P277               | 8   |         |
| 18                                   | SOLENOID, FUEL PUMP      | C4942879           | 1   |         |
| 19                                   | PUMP SET                 | C3911118           | 1   |         |

# GMS60C/S

EC Series



If you have any question or inquiry, please contact  
PowerLink sales organization. Or contact by:  
[info@powerlinkworld.com](mailto:info@powerlinkworld.com)

*Specification may change without prior notice.  
For more info, please contact PowerLink or your local  
distributors.*

EC Series / 2013 1st Edition

Local Distributor